



Stucco Lamundo™

Venetian Plaster—gloss finish

GET YOUR DVD!

Learn to do it at your own pace

Customers can purchase a comprehensive, professionally produced DVD guide, which covers our entire product line. The DVD clearly and simply explains every step of the application process. Learn how to apply Venetian plaster, Marmorino plaster, “Old-World” textures, metallic and stone effects, stencils integration and much, much more.



Meoded Stucco Lamundo™, a genuine lime based Venetian plaster, features easy application and exceptional durability. The tintable paste produces a highly polished, marble-like finish on almost any interior surface. The Product enhances elegant wall spaces in Villas, commercial buildings, theaters, offices and any other interior space that requires the highest quality wall treatments.

Stucco Lamundo™ allows you to create a wide variety of Interior finishes with state-of-the-art effects in any color and texture. The Product can be used as a finish coat for interior walls, ceilings, and many other architectural details. Primarily applied to plaster and gypsum board substrates, the product can also be used to beautify other smooth-surfaced materials.

Usage: For interior spaces only.

Composition: **Stucco Lamundo™** is shipped as a white, paste-base that contains the following:

- Pure Slaked Lime: The main ingredient in **Stucco Lamundo™** plaster, Pure Slaked Lime contributes to the high quality luster and appearance of the finish. The Pure Slaked Lime helps make the finish breathable and moisture-resistant.
- Powdered Marble: Very fine, ground, white, marble powder gives **Stucco Lamundo™** its great body and elegant substance.
- Polymeric Resin: **Stucco Lamundo's™** ease of workability during application and extreme durability after it has been applied comes from the product's patented mixture of Acrylic polymers.

Colors: **Stucco Lamundo™** can be tinted to any color using Universal tints or machine colorants. **Meoded's** natural concentrated “VOC Free” pigments are recommended.

Coverage Guidelines: **Stucco Lamundo™** yields a high coverage rate. In most standard applications, one kilogram of **Stucco Lamundo™** covers 18 to 25 square feet in three coats. Available in the following sizes:

- One Quart = 1.0 kg (2.2 lbs.)
- One Gallon = 5 kg (11 lbs)
- 4.25 Gallon = 20 kg (44 lbs)

Applicable Standards for Stucco Lamundo™


- ASTM D 2369 Determine Volatile Organic Compound (VOC) Content of Paints and Related Coatings.
- ASTM E 84: Provides a Class A finish complying with ASTM E 84 – Surface Burning Characteristics of Building Materials when applied over inorganic reinforced cement board as follows:
 - Flame Spread: 0
 - Smoke Density: 0.

Preparation:

Protection: Tape, mask and cover adjacent surfaces to protect them from splatter.

Priming: Prime substrates to ensure that all surfaces have uniform absorption. Apply **Meoded Quartz Primer™** over gypsum board sealed with PVA primer, wood, and other substrates with uneven suction or moisture absorption. Primer can be tinted if necessary. It should be a shade lighter than the plaster. Allow primer to dry before applying plaster.

Mixing: Mix **Stucco Lamundo™** to distribute colorants evenly. If needed, dilute with a small amount of clean, potable water. Use clean tools for mixing. Avoid contaminating plaster materials with any foreign matter such as dirt, dust and debris.



Note: To the best of our knowledge, the information contained herein is accurate. However, Meoded Paint & Decoration assumes no liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of the suitability of any information or material for the use contemplated the manner of use and whether there is any infringement of patents is the sole responsibility of the user. Additional information may be obtained through your local sales representative or the Meoded Sales Office.





General Installation:

Substrates: Prepare all substrates by cleaning them of all dust and debris and ensuring they are flat, level, smooth, cohesive, and uniform in consistency. Surface should be smooth to a minimum Level 4, or preferably Level 5 finish, clean and free of contamination.

- **New Surface-** Prime substrate with PVA acrylic primer and let it dry fully. Apply one coat of **Meoded** Quartz Primer allowing it 3-5 hours to dry.
- **Existing Surface-** Patch and repair any damaged substrates. Sand oil-based paints and glossy surfaces. Prime substrate with multi-purpose primer and let it dry fully. Then apply one coat of **Meoded** Quartz Primer™ allowing it 3-5 hours to dry. Preparation of flat finished surfaces requires only the application of **Meoded** Quartz Primer™.

Stucco Lamundo™ will adhere to most smooth plaster substrates, wood, metal and other smooth, cohesive substrates.

Installation: Meoded offers a wide variety of specialty plaster tools including stainless steel trowels and spatulas used to install **Stucco Lamundo™**.

- **First Coat-** The first coat of **Stucco Lamundo™** should be applied in a thin and even manner, which covers the entire wall. Allow at least 12 hours for the basecoat to dry.
- **Second Coat-** If required to smooth, slightly sand the first coat with 180-320 grit sandpaper before proceeding. The second coat should be applied and spread tightly in overlapping patch patterns. Allow the second coat to dry for at least 5-7 hours.
- **Third Coat & Burnishing-** Apply this finish coat in the same manner as the second coat. Yet, when material is still moist start pressing, smoothing and gradually **Burnish** the material in 10-15 sq. ft. increments. The more you burnish the shinier and glossier the surface will become.

Custom Finishes: A mock-up or an approved sample board should be used as a standard for a custom finish project. **Meoded** provides personal consultation services to help develop custom applications.

Special Effects: To enhance the elegant and rich appearance of **Stucco Lamundo™**, unique Metallic effects and custom stencils can be integrated.

Wax: After a minimum of 48 hours **Lamundo Wax™**, a protective wax, is recommended to protect your finish from moisture and dirt. The wax also enhances sheen and gloss. Use a spatula or trowel to apply a thin layer of wax. Work the wax into the surface and remove any excess. Buffing the surface produces a polished effect.

Alternatively, leaving trowel or spatula marks enhances the patterns visible in the material from the application process.

Clean-Up: Remove temporary protection, such as masking tape. Clean up spills and splatters using methods that will not damage surfaces.


Delivery, Storage and Handling:

- Keep materials away from direct sunlight. Store them in original, unopened packages in a dry, dark location at temperatures between 45 and 95 degrees F. Always wear OSHA-compliant eye protection. Wear a respirator to sand or scrape the product. Work only in well-ventilated areas. Avoid prolonged skin contact. Avoid working with the material in temperatures below 45 degrees F or above 95 degrees F. Keep away from children. Do not use products older than one year. Read the entire MSDS and product labels.

Appearance Tolerances:

- The application and field conditions may alter the product's appearance. Colors and textures displayed on color cards and product samples are approximate, not exact. Contractors should prepare mock-ups and/or samples to display the actual materials and workmanship prior to final approval. Mottling and variations in appearance and hue are a normal part of any plaster surface and add to **Stucco Lamundo™**'s aesthetic appeal.

Availability: Meoded products are sold through the company's network of distributors throughout the United States. Contact **Meoded** or visit our website www.meodedpaints.com for referrals to local sources.

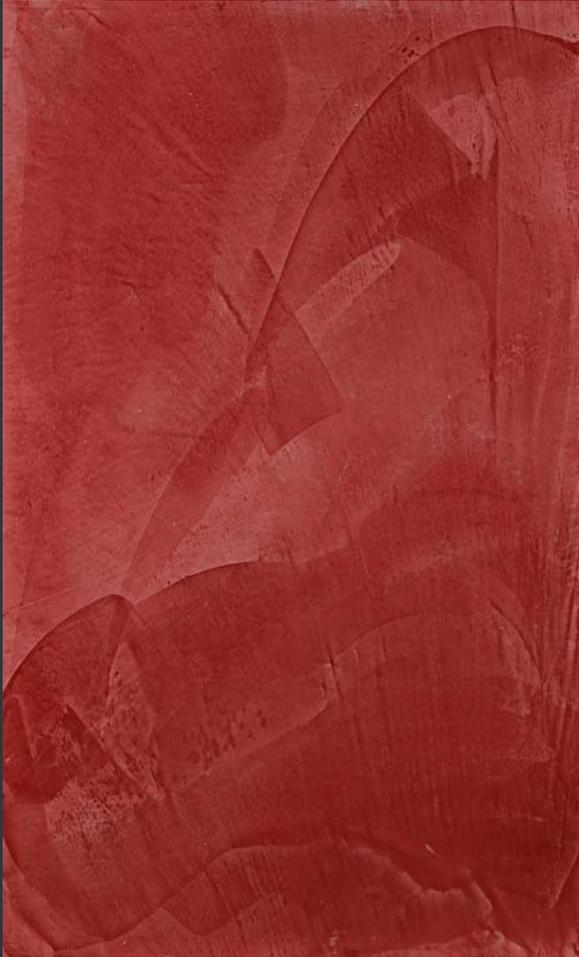

Product Warranty:

Meoded expressly warrants its products to be fit for the ordinary purpose for which they are intended for a period of five years from the date of installation when applied and used within one year of the date of purchase and in accordance with the manufacturer's written instructions.

Meoded Paints & Decoration™ reserves the right to inspect installations prior to resolving any claims made under this warranty. This limited warranty is exclusive and supercedes all other warranties: either written oral or otherwise implied. **Meoded** Paints & Decoration™ also excludes any liability for consequential damages. **Meoded's** liability under this warranty is limited to the replacement of products found to be defective or refund to original purchaser, with proof of purchase.

Cleaning and Maintenance:

Cleaning: Use a dry cloth to remove dust and loose dirt from surfaces, then wipe them with a clean damp cloth as needed. Mild detergents or proprietary cleaning agents may also be used. Scrub gently or use a low-pressure water stream if necessary. Solvents such as acetone or mineral spirits can also be used, provided proper safety procedures are observed. Clean vertical surfaces moving upward from the bottom. Use a damp rag followed by a dry rag to remove any remaining cleaning agents. Find a small, inconspicuous portion of the surface to test cleaning products and methods before applying them to a wider area. Follow the manufacturer's package label instructions.

Blemishes: Some scuff marks, scratches and stains that resist normal cleaning techniques may respond to light sanding with 1000-grit sandpaper or the finest grade steel wool. Find a small, inconspicuous portion of the surface to test these techniques. Reapply sealer and/or wax to sanded areas as necessary.

Repairs: The application style of **Stucco Lamundo™** makes it easy to blend-in repairs. Contact **Meoded** for details.

Warning! This product may contain traces of chemicals known to the state of California to cause cancer and birth defects or other reproductive harm.

Technical Services & Support:

Meoded provides customers with any level of assistance they may need to gain full value from our products. Designers can call upon our professional staff to match colors or create new colors for custom installations. We're ready to provide color charts and sample boards for texture evaluations and comparisons. Installers can call upon our master craftsman for advice and guidance at every step of the installation process. If you have any questions whatsoever, our enthusiastic and courteous staff will provide the support you need to experience the **Stucco Lamundo™** advantage.

Every **Meoded** product comes with instructions that are more than adequate to guide any finish contractor or home owner to a successful installation. In addition, we offer professional seminars for applicators of all skill and experience levels. We teach everything from the basic installation steps to tips and techniques for artists and artisans.

For more info about specifications or samples, please contact:
1-888-8**MEODED**
www.meodedpaints.com
meodedpt@aol.com

